


P TYPE SWING GATE

Introducing the P-Type Swing Gate by Safeguardian Security System - a sleek and advanced solution for controlled access and enhanced security. Our P-Type Swing Gate combines modern design with state-of-the-art features, providing a seamless and secure entry point.

With its contemporary aesthetics, the P-Type Swing Gate adds a touch of elegance to any environment, making it an ideal choice for both commercial and public spaces. The gate's compact design ensures efficient space utilization, making it suitable for installations with limited room or as per the required customisation.



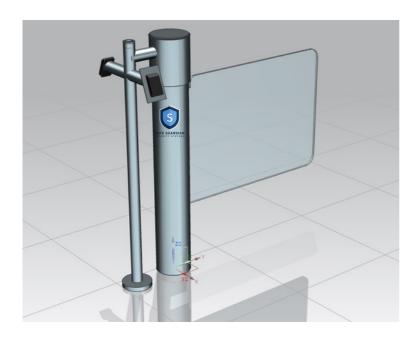



P TYPE SWING GATE

TECHNICAL SPECIFICATION:

Optional Accessories	CMOS Camera-Based Sensor, Digital IN-OUT Counter, Wireless Remote,S.S. Railings, Canopy etc
Included Accessories	Mains Cable, Foundation Bolts etc.
Installation	By anchor bolts on plain surface
Operating Temperature	-10 to 55° C
M.C.B.F.	10 million cycles
Throughput	15-20 persons/minute
Lane Indicator	Built-in (Green or Red)
Passage Width	950mm
Cabinet Dimension	L 400mm * W 230mm * H 1000mm ±5%
Arm material	Stainless Steel Grade 304
Cabinet Material	Available in Stainless Steel Grade 304/316 or Mild Steel
Opening / Closing Speed	2 Sec
Duty Cycle	Intensive use
Access Time Out	0 - 15 sec (Adjustable)
Integration	4 Inputs, 4 PFC outputs & Optional RS485
Communication Protocol	MODBUS TCP or RS485 or RS232
Drive Technology	BLDC / Stepper Motor Drive
Power Consumption	15-40 Watts
Supply Voltage	230V AC ±10%