



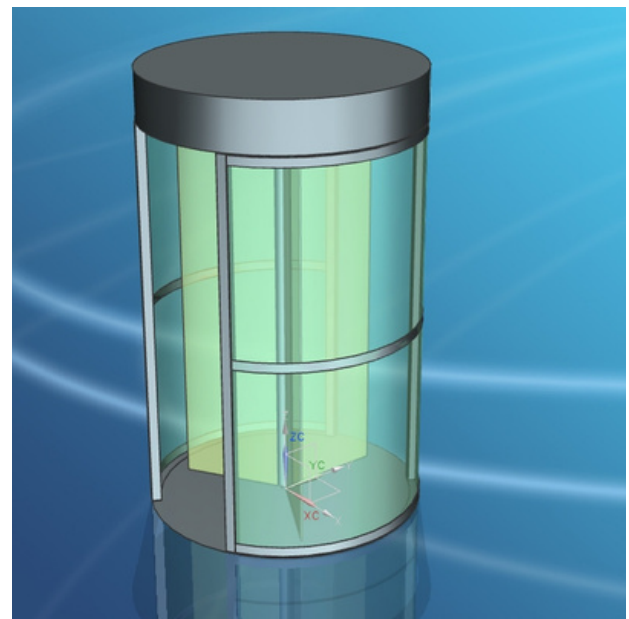

# REVOLVING DOOR

The intelligent control system of our Revolving Door ensures efficient flow management and security. It features adjustable settings to regulate the rotation speed, direction, and locking mechanisms, allowing for a smooth and controlled passage while maintaining a high level of security.

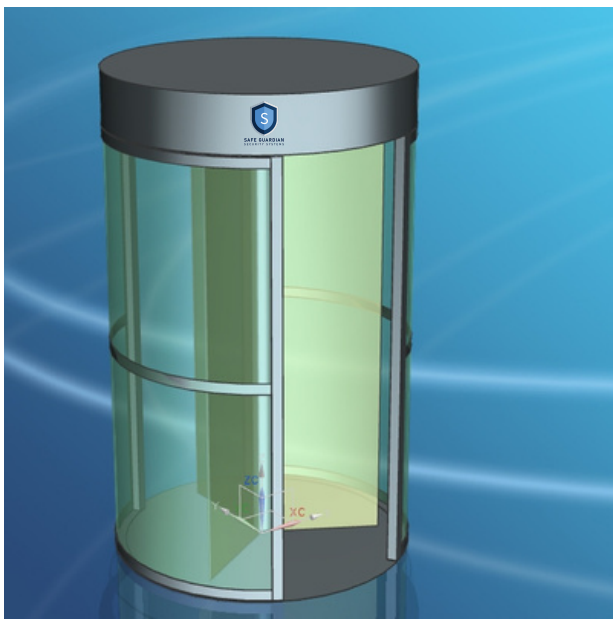

**Customization** is the cornerstone of our Revolving Door Security System, empowering you to tailor the setup to your specific requirements.

Specialty: Artificial Intelligence based

# REVOLVING DOOR

## TECHNICAL SPECIFICATION:

Supply Voltage	230V AC $\pm$ 10%
Power Consumption	10-30 Watts
Drive Technology	120° Electro-Mechanical Drive
Communication Protocol	USB or RS485 or RS232
Integration	4 Inputs, 4 PFC outputs
Access Time Out	0 - 15 sec (Adjustable)
Opening / Closing Time	3s/Person (approx. 22-23 person/minute)
Duty Cycle	Intensive use
Cabinet Material	Stainless Steel Grade 304/316/ Mild Steel and Toughened Frosted Glass or Polycarbonate
Swing Arm Material	Aluminium
Cabinet Dimension	L 1500mm * W 1500mm * H 2300mm $\pm$ 5%
Passage Width	>650mm
Lane Indicator	Built-in (Green or Red)
Throughput	20-25 persons/minute
M.C.B.F.	10 million cycles
Operating Temperature	-10 to 55° C
Installation	By anchor bolts on plain surface
Included Accessories	Mains Cable, Foundation Bolts etc.
Optional Accessories	<b>AI CMOS Camera-Based Sensor for Electronics Gadgets Detection for High Security (eg. Pendrive, SSD, Electronic Watch, Weapons, etc.)</b>